


XO-DIL8

Features

standard size DIL-8
resistance weld

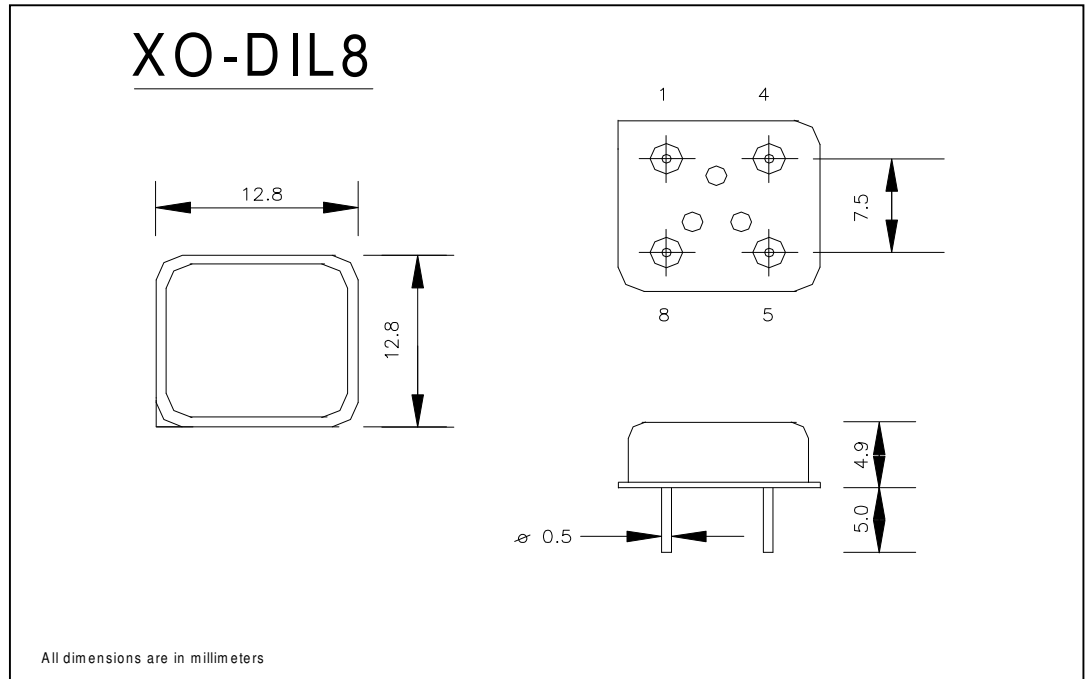

Applications

set top box
microprocessor
ethernet

Specifications

Center Frequency:	1~70MHz
Frequency Stability	±25ppm, ±20ppm
Operating Temperature Range:	-10°C~+60°C
Aging Rate:	±5ppm
Storage Temp Range:	-40°C~+85°C
Output Waveform Load:	HCMOS / TTL (15pF / 10TTC)
Supply Voltage(V):	+3.3V / +5.0V supply current 35mA max.
Symmetry	45 / 55
Rise/full time	8ns max.