


HC-49S3.0

Features

miniature size
 low cost
 through-hole
 high stability
 tight-tolerance
 superb aging characteristic
 excellent anti-shock holder

Applications

Cordless Phones
 Wireless Equipment
 Datacom Hubs / Switches / Routers
 ADSL Modems
 RF transmitters / receivers
 A/V applications

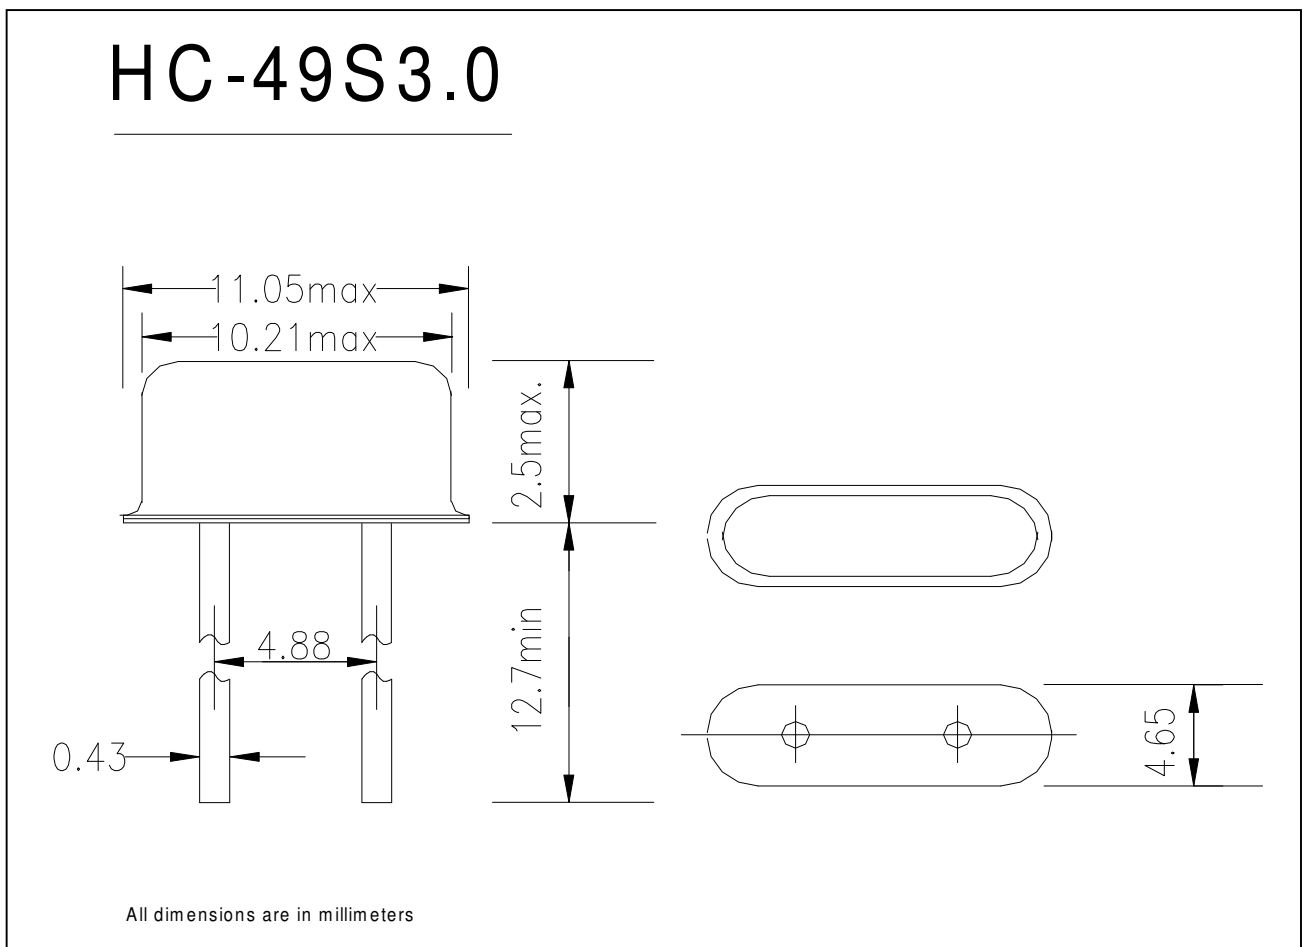

Specifications

Vibration Mode:	fundamental / third overtone / fifth overtone
Frequency Tolerance at 25°C:	±10ppm ~ ±50ppm
Loading Capacitance:	10pF~32pF or series
Shunt Capacitance:	7.0pF max.
Equivalent Series Resistance:	see Resistance Table
Frequency vs. Operating Temp:	see Frequency vs Operating Temp Table
Drive Level:	10 μ W ~ 1000 μ W
Insulation Resistance:	500M Ω min / DC 100V
Storage Temperature Range:	-40°C ~ +85°C

Resistance Table (ESR)

Frequency Range(MHz):	HC-49U	HC-49T	HC-49S3.0	HC-49SMD	Vibration mode
1.800+ ~2.000	700	800	1200	1200	fundamental
2.000+ ~ 3.000	500	600	1000	1000	fundamental
3.000+ ~ 3.200	300	400	600	600	fundamental
3.200+ ~ 4.000	150	200	180	180	fundamental
4.000+ ~ 4.500	90	150	150	150	fundamental
4.500+ ~ 5.000	70	80	120	120	fundamental
5.000+ ~ 7.000	50	60	100	100	fundamental
7.000+ ~ 10.000	35	40	90	90	fundamental
10.000+ ~ 20.000	25	25	70	70	fundamental
20.000+ ~ 25.000	45	50	120	120	third overtone
25.000+ ~ 70.000	40	40	100	100	third overtone
70.000+ ~ 160.000	70	70	-	-	fifth overtone

Frequency vs Operating Temp Table

Temp(°C)	PPM	±2.5	±5	±10	±15	±20	±30	±50
0 ~ +50		*	*	*	*	*	*	*
-10 ~ +60			*	*	*	*	*	*
-20 ~ +70				*	*	*	*	*
-30 ~ +80					*	*	*	*
-40 ~ +85						*	*	*

Other Options

third lead
 insulation tag
 tray pack or tape pack
 ultra low profile 2.5mm height